


995R

Edge Pinning Claw

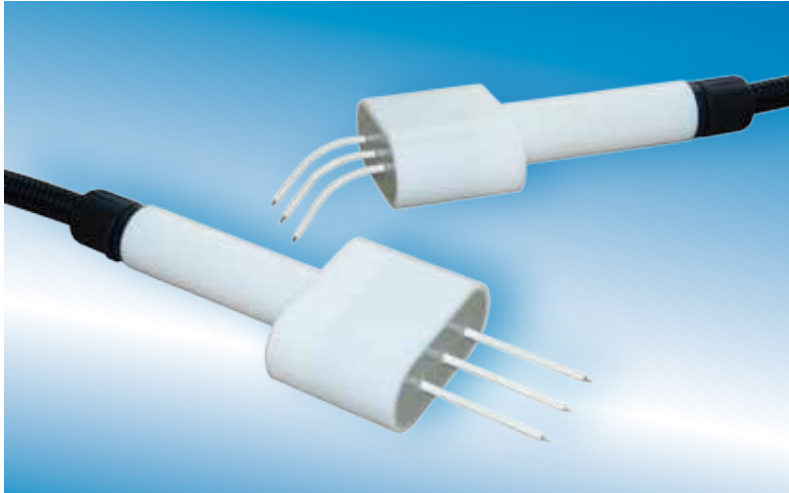


The 995 Edge Pinning Claw is a powerful pinning head, intended for use on cast-film lines. Pinning the edges of the cast film to the chill roller prevents necking of the film. Resistively coupled titanium pins deliver spark free pinning.

The 995-CLAW can be powered from either our 30kV or 50kV range of 992v3 generators.

995R-CLAW/01/EN/-11/09

Technical Characteristics

Overall dimensions	30 x 67 x 180mm
Pin dimensions	2mm x 50mm
Construction	PTFE Body, Polyurethane potting compound. Titanium pins.
Maximum operating temperature	Including conduit - 115°C Head only - 130°C
HT Cable	5m, longer upon request
Operating voltage	Up to 50kV DC
Operating polarity	Either +VE or -VE

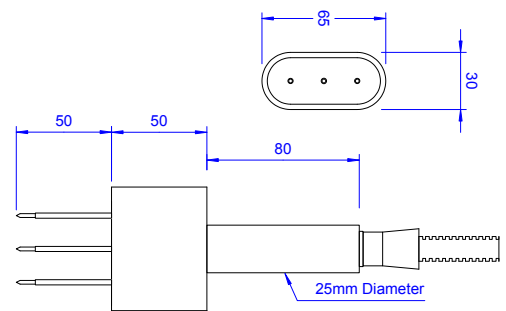

Feature

Benefit

Resistively coupled	Spark free, independent operation
Flexible titanium pins	Adjustable to suit installation, long service life

Product shown in this document may be covered by one or more patents, patents applied for and/or registered designs and/or trade marks. For further information please refer to our Head Office or visit www.meech.com.

Meech International

UK: +44 1993 706 700
Hungary: +36 27 535 075

USA: +1 330 564 2000
China: +86 21 6119 6725

Belgium: +32 8067 0204

email: sales@meech.com
web: www.meech.com

